
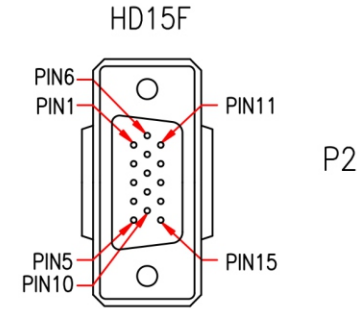
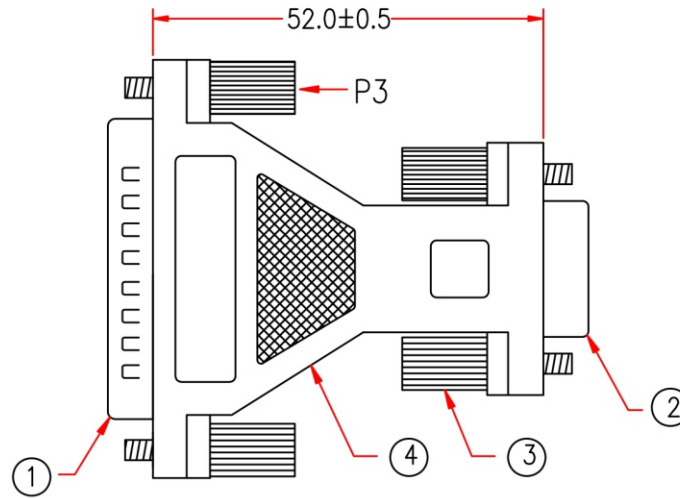


P1,P2: M-Y417A  
M-417A  
P3: M-427B

Customer No: No.1

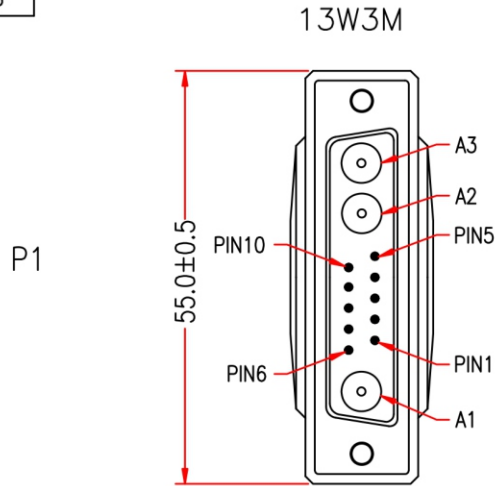

4345

	P1	P2
CONDUCTOR	A1	1
SHIELD	A1	6
CONDUCTOR	A2	2
SHIELD	A2	7
CONDUCTOR	A3	3
SHIELD	A3	8
	4	10
	10	
	6	12
	5	13
	7	14
	1	15
SHIELD		SHIELD

NOTE: All relevant materials are complied with RoHS directive .

4	Jumper Wire UL1061/26#/1C, OD1.0mm, COLOR WHITE, LENGHT 47mm*5PCS, LENGHT 55mm*1PC, LENGHT 28mm*1PC, DRAWING NO. EH002601C-013	H5SE06-0304W01	7	M304
	NON-UL 1C COAXIAL 28AWG, OD2.5mm, JACKET RED(1pcs), GREEN(1pcs) BLUE(1pcs), LENGTH 47mm, DRAWING No. ECSS2801T-054	H5RL16-0304	3	M304
	BLACK HEAT SHRINK TUBE 3.0*10mm	A4HA26-0959	6	M959
	BLACK HEAT SHRINK TUBE 1.0*10mm	A4HA23-0959	6	M959
	COPPER FOIL 20*100mm	A6LA05-0309	1	M309
	MOLDED PE COLOR TRANSPARENT	A5BA02-7777		M7777
	MOLDED PVC BLACK	H1BF01-0304K09		M304
3	MOLDED THUMBSCREW #4-40, LENGTH 21.5mm, BLACK	A6AA09-0095	4	M95
2	HD15 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1CA01-0277U09	1	M277
1	13W3 MALE CONTACTS WITH THREE POWER PIN FEMALE AND TEN PIN MALE, BLACK INSULATOR	A1AL02-0585	1	M585
No.	DESCRIPTION		Q'TY	Supplier

APPROVED		<b>PCCABLES.COM INC</b>	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU		
DRAWING	XIAO		
DATE	05/JUL/19		
ITEM NO.	PCC-00627	UNIT:mm	

REV.2 2019.07.05 MODIFY NOTE

REV.1 2007.05.31 MODIFY DRAWING No FOR ECSS2801T-014 TO ECSS2801T-054

CHECKED