
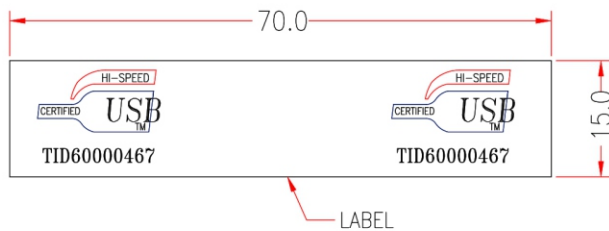


P1: M-942A


P2: M-945A

Customer No:

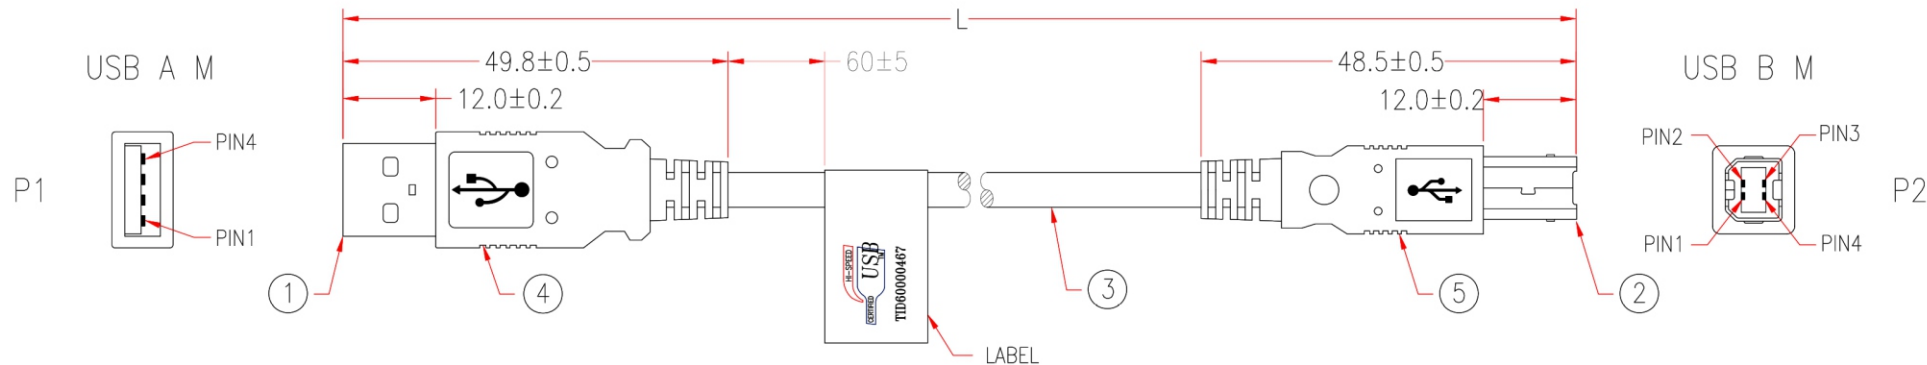

MARKING: HI-SPEED USB Revision 2.0 SHIELDED 28AWG/2C+24AWG/2C (UL) E305668 TYPE CM 75°C CSA 204790 TYPE CM 75°C MSL

* NOTE: All relevant materials are complied with RoHS directive .

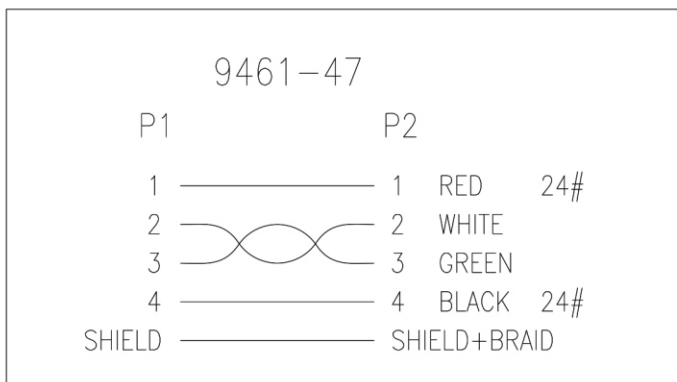

5	MOLDED PVC BEIGE	H1BF01-0304K09		M304
4	MOLDED PVC BEIGE	H1BF01-0304K09		M304
3	USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG AND 2C 24AWG, AMA BRAID 64% SHIELDING WITH DRAIN WIRE,OD 4.5mm,JACKET BEIGE ,DRAWING No.EUAB2801P2402C-139	H5KH29-0304K09	L-20mm	M304
2	USB B MALE, GOLD FLASH ON CONTACTS, WHITE INSULATOR, SHORT A PIERCE TYPE	A1HB15-0454	1set	M454
1	USB A MALE, GOLD FLASH ON CONTACTS, WHITE INSULATOR, SHORT A PIERCE TYPE	A1HA22-0454	1set	M454

No.	DESCRIPTION	Q'TY	Supplier
-----	-------------	------	----------

APPROVED		PCCABLES.COM INC	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm		
CHECKED	HU				
DRAWING	ZHU				
DATE	04/JUN/19	ITEM NO.	70519	UNIT:mm	

REV.1 2019.06.04 ADD NOTE.

CHECKED